


Borlabs Cookie Integration

HandL UTM Grabber / Tracker How to collect and track UTM variables via Borlabs Cookie
Integration step by step

- [Make HandL UTM Grabber compatible with Borlabs](#)
- [Add HandL UTM Grabber Support in Borlabs v3](#)

Make HandL UTM Grabber compatible with Borlabs

First create a custom group under Marketing

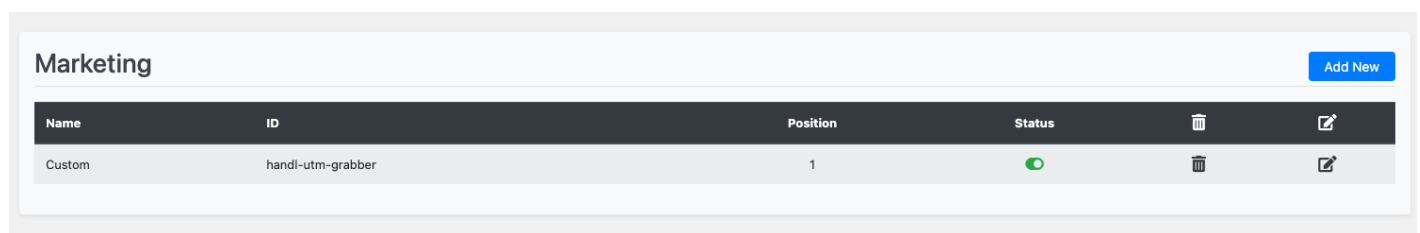

Add following entries under Cookie Name section

```
utm_*, handl_*,first_*,organic_source*,gaclientid,user_agent,handlID
```

The screenshot shows the 'Cookie Information' form in the Borlabs Cookie Manager. The form has the following fields: Name (set to 'Custom'), Provider (set to 'handl-utm-grabber'), Purpose (empty), Privacy Policy URL (empty), Host(s) (empty), Cookie Name (set to 'utm_*, handl_*,first_*,organic_source*,gaclientid,user_agent,handlID'), Block Cookies before Consent (set to 'OFF'), and Cookie Expiry (empty). There are 'Save all settings' and 'Go back without saving' buttons at the bottom. On the right side, there is a 'Tips' section with information about cookie management.

Cookie Information

Name: Custom

Provider: handl-utm-grabber

Purpose:

Privacy Policy URL:

Host(s):

Cookie Name: utm_*, handl_*,first_*,organic_source*,gaclientid,user_agent,handlID

Block Cookies before Consent: OFF

Cookie Expiry:

[Save all settings](#) [Go back without saving](#)

Tips

Cookie Information

The information stored here has no technical effects and serves exclusively to inform the visitor, unless you activate **Block Cookies before Consent**.

The information of the **Services** provided by us may not be complete and should be checked before use.

What is a Host?

The host is a part of a URL, often the domain. For example, if the URL is <https://www.example.com/index.html> the host would be www.example.com.

Block Cookies before Consent

If you activate this option Borlabs Cookie searches and deletes cookies that match the **Cookie Name**. You can also use * to search for multiple names, e.g. if you enter the Name **example_*** Borlabs Cookie will search and delete the cookies **example_abc** and **example_xyz**. Separate multiple cookie names with a comma.

This function is mainly intended to delete session cookies set by third-party plugins via PHP. JavaScript cookies can also be deleted, but only if they belong to the same domain.

Example: if the website runs under www.example.com, no cookie created for [example.com](https://www.example.com) can be deleted.


Named cookies will be only set after consent by the visitor was given and the website was reloaded.

This will block all the HandL UTM Grabber cookies before proper consent given

Add HandL UTM Grabber Support in Borlabs v3

Since version 3, Borlabs has updated its user interface and the method for adding cookie exceptions. Here, we will explain how you can do this in version 3.

Click on "Services" under "Consent Management" in Borlabs as shown here.

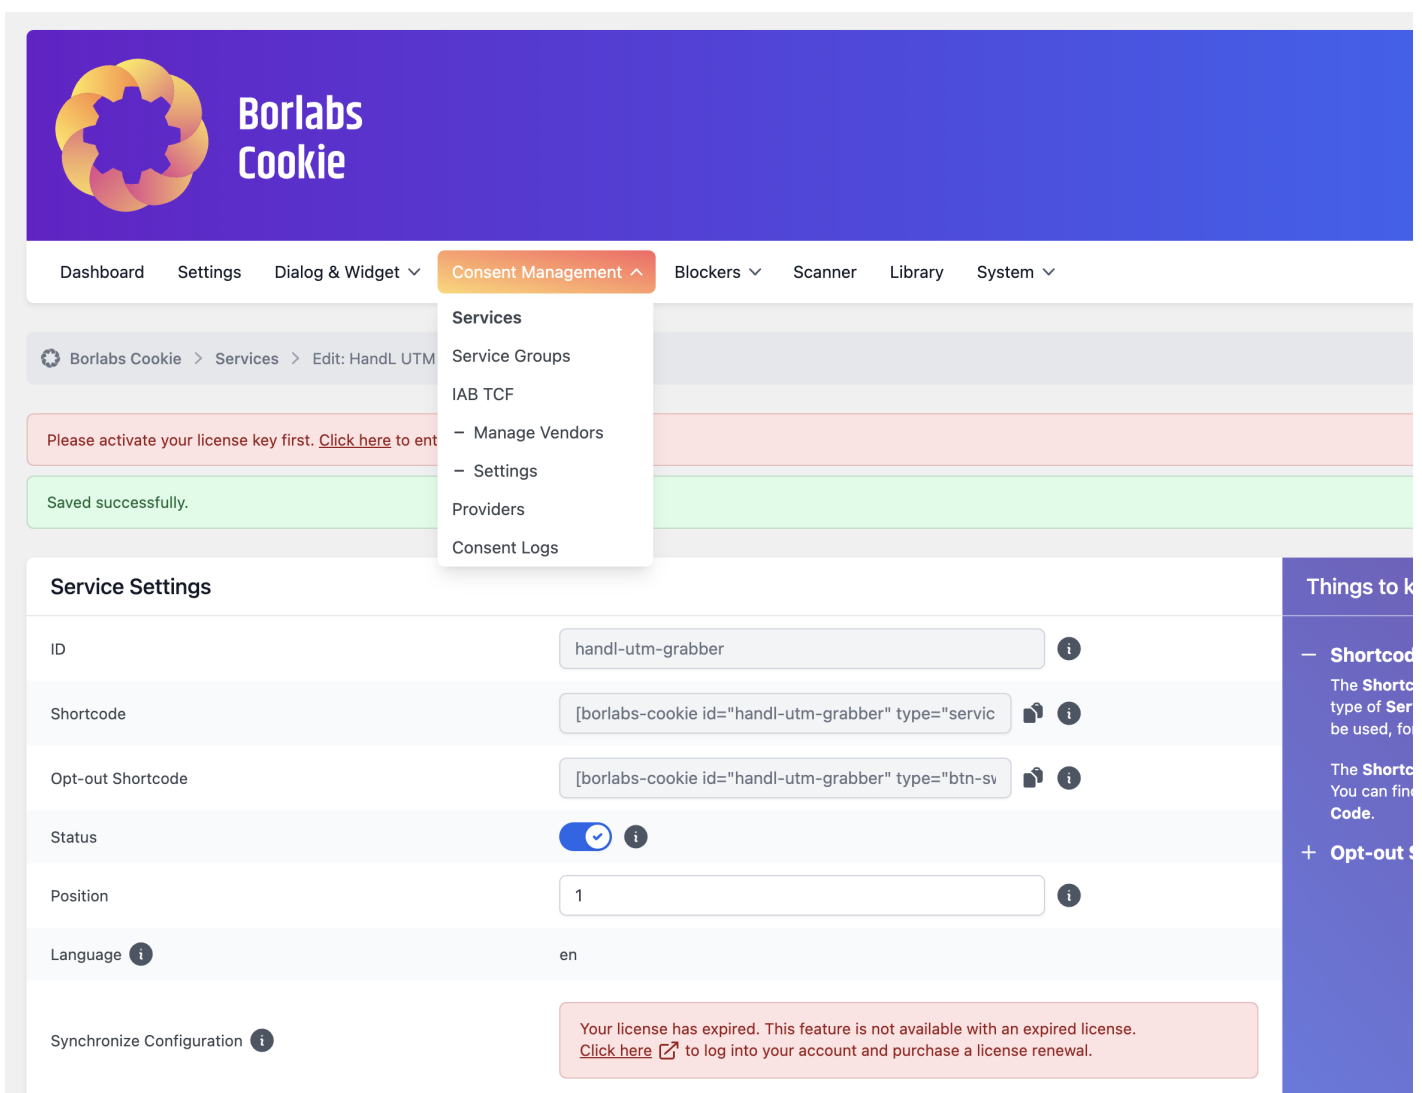

The screenshot displays the Borlabs Cookie management dashboard. The top navigation bar includes links for Dashboard, Settings, Dialog & Widget, Consent Management (highlighted), Blockers, Scanner, Library, and System. A dropdown menu under 'Consent Management' shows options: Services, Service Groups, IAB TCF, Manage Vendors, Settings, Providers, and Consent Logs. The 'Services' option is selected, leading to the 'Edit: HandL UTM' page. A red message states: 'Please activate your license key first. [Click here](#) to enter your license key.' A green message below it says 'Saved successfully.' The 'Service Settings' section for 'handl-utm-grabber' includes fields for ID, Shortcode, Opt-out Shortcode, Status (checked), Position (1), and Language (en). A 'Synchronize Configuration' button is at the bottom left. A red warning box at the bottom right states: 'Your license has expired. This feature is not available with an expired license. [Click here](#) to log into your account and purchase a license renewal.' A sidebar on the right titled 'Things to know' contains sections for 'Shortcode' and 'Opt-out'.

Fill out the form like this

ID: handl-utm-grabber (this is very crucial make sure you use this verbatim)

Status: On

Position: 1

Language: en

Name HandL UTM Grabber

Description HandL UTM Grabber is a lead tracking and attribution plugin for WordPress

Service Group Marketing

It will look like this after saving.

Service Settings

ID	<input type="text" value="handl-utm-grabber"/>	
Shortcode	<input type="text" value='[borlabs-cookie id="handl-utm-grabber" type="servic'/>	
Opt-out Shortcode	<input type="text" value='[borlabs-cookie id="handl-utm-grabber" type="btn-sv'/>	
Status	<input checked="" type="checkbox"/>	
Position	<input type="text" value="1"/>	
Language	en	
Synchronize Configuration		
Synchronize Translation		

[Go back without saving](#) [Save all settings](#)

Service Information

Name	<input type="text" value="HandL UTM Grabber"/>	
Description	<div>HandL UTM Grabber is a lead tracking and attribution plugin for WordPress</div>	

[Go back without saving](#) [Save all settings](#)

Fortunately, you can use a wildcard to input cookie names, making this step straightforward. Please visit this page to retrieve a list of the cookies used by our plugin [Native WP Shortcodes](#).

Cookies Add Cookie

Name	Hostname	Path	Lifetime	Purpose	Type	Description	#
utm_*	#	/	30	Tracking	HTTP		
first_*	#	/	30	Tracking	HTTP		
handl_*	#	/	30	Tracking	HTTP		
organic_so	#	/	30	Functional	HTTP		
gaclientid	#	/	30	Functional	HTTP		
user_agent	#	/	30	Functional	HTTP		
handlID	#	/	30	Functional	HTTP		

Save the settings, and voila!